

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088295 A1

- (51) International Patent Classification⁷: **G01N 21/90**
- (21) International Application Number: **PCT/NL2004/000150**
- (22) International Filing Date: 27 February 2004 (27.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1022810 28 February 2003 (28.02.2003) NL
- (71) Applicant (for all designated States except US): **HEINEKEN TECHNICAL SERVICES B.V.** [NL/NL]; Burgemeester Smeetsweg 1, NL-2382 PH Zoeterwoude (NL).
- (72) Inventor: **AKKERMAN, Jensen, Peter**; Nieuwe Kerklaan 6, NL-1271 BV Huizen (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LANDMAN, Bernardus, Cornelis, Johannes** [NL/NL]; Noordeinde 373, NL-2771 WR Boskoop (NL).
- (74) Agent: **HOEBEN, Ferdinand, Egon**; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR INSPECTING PACKAGINGS

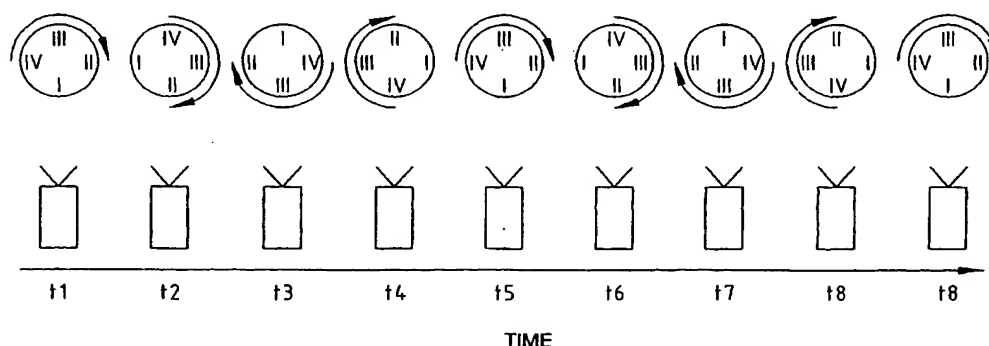

(57) Abstract: The present invention relates to a method for inspecting packagings for a liquid product, such as drinks, comprising steps for: - setting a packaging into rotation, - irradiating the packaging during the rotation with a radiation of a predetermined wavelength, - making at least one series of at least two recordings of at least a part of the content of the packaging during the rotation, this with an image recording device suitable for making recordings at the predetermined wavelength.

METHOD AND SYSTEM FOR INSPECTING PACKAGINGS

Methods and systems have recently been developed for inspecting packagings such as drink-containing bottles.

5 The occurrence of for instance glass splinters in beer can result in corporate losses as a result of for instance rejected batches, return operations and damage to the company reputation because the presence of glass splinters will be the subject of negative press reports.

10 From the international patent application PCT/NL96/00049, which is deemed as interpolated herein by means of reference, is known a method and apparatus for detecting extremely small glass splinters in filled beer bottles. Each filled bottle is herein rotated for a short
15 time in a separate station and then brought quickly to a standstill, whereby movements of the small glass splinters can be detected using a light source-camera system and associated image processing.

This method functions well enough in practice but
20 requires a complex apparatus in the filling line of a brewery or soft drink manufacturer. Carrying out an inspection using such a method takes on average about 2.1 seconds per bottle. Such a system is moreover expensive because, in order to achieve the high average speed of
25 for instance 60,000 bottles per hour of a filling line, a plurality of rotation and image recording stations is required, for instance 36.

So as to improve the above stated method, the present invention provides a method for inspecting
30 packagings for a liquid product, such as drinks, comprising steps for:

- setting a packaging into rotation,
- irradiating the packaging during the rotation with a radiation of a predetermined wavelength,

- making at least one series of at least two recordings of at least a part of the content of the packaging during the rotation, this with an image recording device suitable for making recordings at the predetermined wavelength.

A method according to the present invention has the advantage that a good inspection is achieved in a shorter time per packaging, whereby a relatively small number of rotation and image recording stations (detection units, inspection units) is required. When an embodiment according to the present invention is applied, an inspection takes an average of 0.7 second per bottle. One result hereof is that inspection systems can be realized more easily and more cheaply by applying the method.

A system with a smaller number of rotation and image recording stations, for instance 12-24, will suffice to perform an embodiment of a method according to the present invention.

In a further embodiment the packaging is situated in substantially the same rotational position relative to the recording device during successive recordings of the series. Successive images are made of a bottle revolving on its vertical axis. During rotation of the bottle at least 1 x an image is recorded of the (continuously revolving) bottle. These images are stored. Each image is compared to a preceding or subsequent image of therefore the same bottle with 360 rotation difference. When these two successive images are compared, the bottle will be situated in the same position while a piece of glass possibly present in the bottle will however have another position in the image. This glass displacement between the two images can be detected, for instance by subtracting the images from each other. If anything remains in the image, then glass is present. Subtracting

the images from each other is a per se known principle which is applied inter alia in the inspection of labels. A bottle with a glass particle will be detected.

It is possible to already carry out the inspection
5 during the rotation (when the bottle is revolving and the glass is moving in relation to the bottle). The spin and inspection can in principle be carried out together in about 0.7 second, whereby for instance only 18 (12-24) inspection units are required to realize a capacity of
10 60,000 bottles per hour.

According to a further embodiment successive recordings of the series are made with an intervening time interval of a predetermined duration. A relatively simple method of activating the camera for the purpose of
15 taking a picture hereby becomes possible.

The rotation speed is preferably varied during the period in which the recordings of a series are made. A difference between the speed of the content of the packaging and the packaging is hereby realized.

20 There is further a preferred embodiment wherein the rotation direction is varied during the period in which the recordings of a series are made. Changes in speed enhance the effect of the difference in speed.

It is advantageous to make a plurality of recordings
25 from a different angle of view in relation to the packaging. It hereby becomes possible for instance to detect particles in packagings on which labels have already been arranged.

Image information from the images of a series is
30 preferably compared in order to detect the presence of undesired particles, such as glass particles, in the packaging.

A further aspect of the present invention relates to a system for performing a method as claimed in one or more of the foregoing claims.

Further advantages, features and details of the present invention will be elucidated on the basis of the following description of preferred embodiments thereof, with reference to the annexed drawing, in which:

- fig. 1 shows a schematic view of an inspection station according to the present invention;
- 10 - fig. 2 shows a time diagram of a recording schedule according to an embodiment of the present invention;
- fig. 3 shows a time diagram according to the embodiment of fig. 2;
- 15 - fig. 4-8 show a time diagram of different embodiments according to the present invention;
- fig. 9-12 show a diagrammatic view of further embodiments according to the invention.

One beer bottle B at a time (fig. 1) is clamped in a detection unit 12 between a ring 1 and a head 2. A motor 3, which is coupled to head 2 via a speed-reducing mechanism 4 and an optional brake 5, serves to set the bottle into rotation. Ring 1 and head 2 are therefore mounted rotatably relative to a frame 6. Light from a light source 7 is further cast into the bottle and recordings are made of the content of the bottle. Because there are differences in the rotation speed of the bottle and the liquid in the bottle owing to mass inertia, the content will move relative to the bottle. If recordings are now made at different moments using a CCD camera 8, the content will be situated relative to the bottle at a position other than the bottle in successive recordings. Use is made of this to detect for instance glass particles.

The detection unit further comprises an activation signal generating unit, (e.g. a laser trigger) for creating a signal on the basis of which a camera 8 makes a picture. A laser transmitter/detection unit 16 emits a laser beam 17 in the direction of a reflector 15 on a rotating part of the detection unit. If the reflector passes through the laser beam, this latter is reflected and the reflected beam is received by detection unit 16. A signal is then sent to the camera on which a picture is taken.

An alternative hereto is that the motor generates a position signal to the camera, on the basis of which this latter takes a picture.

The image information is processed in computer 10 and can be displayed on screen 11.

In addition to the above described advantages, embodiments described hereinbelow have the further advantages compared to the prior art that:

- inspection can take place directly during rotation of the bottle,
- the bottle does not have to be physically stopped and held still,
- the bottle can be inspected from a number of sides instead of from one side, thereby increasing the reliability of inspection,
- fouling behind a label, (heavy) scuffing, embossing or pre-printed bottle can be detected,
- the machine can be placed after the labelling device, whereby flexible line lay-outs are possible and the machine can be placed as last in the line, and a real final inspection is therefore possible,
- there is less mechanical complexity, whereby the mechanical reliability and availability of the machine (OPI) improves,

- because the inspection units are individually controlled, an optimal spin profile can be implemented per inspection unit,

5 - in the case of a line stoppage all bottles present in the carrousel can be inspected, whereby in the case of a line stoppage there are no uninspected bottles (which result in product loss and waste).

In addition to recording a series of images consisting of one picture per rotation, it is also
 10 possible to record a plurality of images per rotation (for instance at 0°, 90°, 180° and 270° or more (fig. 2) with view I, II, III, and IV respectively). Images which are recorded at a determined angle are then compared to a subsequent image recorded 360 after this determined
 15 angle. This is shown in the following time diagram (N.B. in top view: the bottle rotates about its vertical axis but is otherwise stationary relative to the camera):

On the basis of this time diagram the following table is compiled for the case that recordings of 4
 20 images per rotation are made, in which is indicated which part of the bottle is being shown at a particular moment in time:

	image (t1)	I	
25	image (t2)		II
	image (t3)		III
	image (t4)		IV
	image (t5)	I	
	image (t6)		II
30	image (t7)		III
	image (t8)		IV
	image (t9)	I	
	etc.		

Herefrom is made the following table which indicates at what times a particular part of the bottle is being shown. If no movement is detected between the two successive images of the same particular part of the bottle, no glass or contamination has been found.

Pictures can be taken at for instance the following points in time:

- | | |
|-------|------------------------|
| I | t1, t5, t9, t13, etc. |
| 10 II | t2, t6, t10, t14, etc. |
| III | t3, t7, t11, t15, etc. |
| IV | t4, t8, t12, t16, etc. |

The movement of the glass relative to the bottle is realized as follows (fig. 3):

When the bottle undergoes an angular displacement, the liquid in the bottle will come into motion more slowly than the bottle. The (glass) particle (G) in the liquid therefore comes into motion more slowly than the bottle. The position of the (glass) particle compared in two images (with substantially 360° difference in bottle rotation relative to each other) will change when the rotation speed of the bottle is increased.

When the rotation speed of the bottle is decreased, the liquid in the bottle will rotate more rapidly after a time than the bottle. The (glass) particle in the liquid will then also rotate more rapidly than the bottle. The position of the (glass) particle compared in two images (with substantially 360° difference in bottle rotation relative to each other) will change when the rotation speed of the bottle is decreased in similar manner as stated when the rotation speed is increased.

As addition to the above method of generating relative movement, use can also be made of the period

immediately after start-up of the bottle rotation. At that moment the (glass) particle will, owing to the inertia of movement, still be at rest while the bottle is already moving. At this stage, which preferably lasts
5 about 0-0.3 sec., with a correct choice of exposure and camera shutter time the bottle will be shown out of focus and the (glass) particle will be shown sharply in focus or moving very slowly. The (glass) particle can be detected by applying per se known image processing
10 techniques.

It will be apparent that it is also possible with this method to inspect a larger or smaller number of parts of the bottle. The advantage compared to other methods, including the patent (WO 97/14956) is that the
15 bottle is inspected from a plurality of sides, whereby the chance of detection is increased (or the inspection time can be shortened while the chance of detection remains the same). This advantage is of particular importance in the case of pre-labelled bottles and
20 scuffed bottles.

In order to enable recording of the above series of images the use of asynchronous reset cameras is to be recommended. These are cameras activated (triggered) by an external signal to start the recording of an image. In
25 this application this can take place by using a position feedback signal coming from a detection unit.

The rotation pattern can be adjusted with this method such that an optimal movement is achieved during recording of images, and thereby detection of possible
30 particles (fig. 4). The concept of rotation profile is important for this purpose. The rotation profile shows the angular speed of the bottle on its vertical axis as a function of time. A simple example is:
t0 - t1: start-up

t1 - t2: continuous rotation

t2 - t3: braking

It is possible with the method to record and process images during the whole period t0 to t3.

5 It is particularly advantageous to continue varying the angular speed (fig. 5) because the particle then remains moving continuously in relation to the bottle.

Also possible are more complex (for instance reverse rotation) or very short rotation profiles (fig. 6, 7).

10 Very short inspection times can hereby be realized, which can result in a very compact machine. An optimal rotation profile (fig. 8) can also be set for specific products, for instance syrup.

Integration with other, already existing inspections
15 which are carried out in practice on a bottle is made possible by this method of camera per detection unit with separately controlled motor:

- 360 Label inspection making use of bottle rotation,
- Side wall inspection of decorated and embossed bottles,
- 20 and for instance
- Foil detection.

A number of cameras in the fixed world can further be used for further inspections wherein the bottles are oriented.

25 Data communication can be minimized by linking motor control and image recording triggering by means of intelligent control.

Image series allocation to different PCs can be realized by means of for instance the Firewire protocol
30 (IEEE 1394 standard) or by fast PCs or by multiplexer technology.

The relative movement of the (glass) particle to be detected in the two images, with 360 difference, in relation to the rotating bottle must be great such that

software detection through movement detection is possible (because position of glass particle changes).

In a further embodiment the image recording is carried out at a regular time interval and at unknown angular displacement (synchronous reset camera) instead of at an unknown moment and regular angular displacement of the bottle (asynchronous reset camera): The advantage hereof is a simple camera activation. It is more complicated here that the recorded images of a series can be/are of different sides of the bottle, whereby owing to the visible differences between the sides subtraction images will not be black even if (glass) particles are not present. With a good dark field illumination the orientation of the bottle is not important because the side, and therefore also the differences between the sides, will then not be visible in the image (black image - black image = black image). If the dark field illumination is not perfect, it is possible by means of image processing techniques to distinguish reflections from (glass) particles.

Further embodiments according to the present invention comprise:

- a carrousel with between 12-24 detection units. Such a carrousel can be placed in per se known manner in a filling line for bottles. A further variant is a detection line with for instance fixed cameras, wherein the bottles advance one after another during the detection in per se known manner;
- bottle orientation feedback means per detection unit (for controlling the moment of camera triggering);
- a drive unit per detection unit (e.g. stepping or servo motor with position feedback). One drive can optionally be used for all detection units;
- a camera per detection unit;

- image field for the images for recording not only on the underside of bottle but now also on the whole bottle for the purpose of inspecting foils and detecting floating objects;

5 - (Firewire) IR camera 80 frames/sec or more;

 - Infrared illuminator with (modified) dark field illumination;

 - colour cameras for inspecting labels, caps, and/or filling level of bottles;

10 - image processing computers (IPPs) and communication computers (COMMPC);

 - optical slip ring for video and other data transfer;

 - hardware for industrial environment: camera, illuminator, system housing, IPP PC, COMMPC. This means being in accordance with for instance IP65.

 In figures 9-12 several embodiments are shown for arranging camera and illumination positions with respect to each other and/or the bottle to be examined. In figure 20 9, a bottle B that is placed in the rotation head 30 is rotated as described in the above. The bottles is illuminated by means of the lamp or radiation means 32 through the bottom of the bottle.

 In figure 10 the bottle is illuminated from the 25 sides by means of lights 34 and 35. The camera is positioned under the bottom of the bottle for taking images. In figure 11 the arrangement of figure 10 is altered in that the camera is placed at an angle with respect to the heart line of the bottle. Advantages of 30 these embodiments are that the whole bottom area is recorded in a recording. A result hereof is that e.g. a glass particle can be spotted quicker and in several subsequent recordings. The inspection time can therefore be reduced. A further advantage is that when a process is

used in which the bottle is dried before inspection, merely the bottom needs to be dried because the recordings are taken from below. Such drying of the bottom can be performed by means of quickly spinning the bottle, which spinning is advantageously performed for the detection process. Furthermore, an advantage of the skewed angle of the camera in fig. 11 is that the recording is performed at an angle with respect to the rim of the head which means that detection in the utmost lower part of the bottom area in the bottle can more fully be performed. Also less dirt is likely to fall on the camera as it is positioned sideways with respect to the bottle.

A further advantageous embodiment (fig. 12) comprises two lamps 34 radiating into the bottle from the sides and a prism 42 with three sides 39,40,41 for reflecting light. Also mirrors 44 are arranged in this embodiment for reflecting light. In this arrangement the light from the bottle can be detected by the camera from two sides, thereby improving the amount of information from the bottom area of the bottle that is recorded by the camera. In such an embodiment also 2 cameras can be deployed for capturing image data reflecting from the prism, or capturing the light directly from the mirrors. The possibility of e.g. a glass particle falling in the 'shadow' of the head 30 is thereby diminished.

Also, as depicted in schematic 13, a camera can be placed at an angle above the bottom area of the bottle, e.g. having vision through the shoulder of the bottle. The taking of image recordings can e.g. be triggered by the orientation of the bottle or at a predetermined or a random time interval. The orientation of the bottle can in the first case e.g. be determined by means of a sensor.

The processing of the recorded images can be handled in several ways. Images with a substantially identical bottle orientation can be mutually subtracted and the difference image can be analysed with respect to residual information. Alternatively, the recorded image can be analysed with respect to an earlier recorded image by time shifting or back rotating towards the bottle orientation/position of the earlier recorded image and subsequently further processing thereof by means of e.g. the subtraction process. Also, a trajectory can be determined and described of particles recorded on several images. Based on parameters of the trajectory the nature of the particle can be determined as being e.g. glass, which would lead to a bottle reject, or organic material, which would lead to an accepted bottle.

Different embodiments described in the foregoing can be freely combined. The rights sought are defined by the appended claims.

CLAIMS

1. Method for inspecting packagings for a liquid product, such as drinks, comprising steps for:

- 5 - setting a packaging into rotation,
 - irradiating the packaging during the rotation with a radiation of a predetermined wavelength,
 - making at least one series of at least two recordings of at least a part of the content of the
10 packaging during the rotation, this with an image recording device suitable for making recordings at the predetermined wavelength.

2. Method as claimed in claim 1, wherein the packaging is situated in substantially the same
15 rotational position relative to the recording device during successive recordings of the series.

3. Method as claimed in claim 1, wherein successive recordings of the series are made with an intervening time interval of a predetermined duration.

20 4. Method as claimed in one or more of the foregoing claims, wherein the rotation speed is varied during the period in which the recordings of a series are made.

5. Method as claimed in one or more of the foregoing claims, wherein the rotation direction is varied during
25 the period in which the recordings of a series are made.

6. Method as claimed in one or more of the foregoing claims, wherein a plurality of series of recordings are made wherein recordings of the same rank from different series are made successively.

30 7. Method as claimed in one or more of the foregoing claims, comprising steps for comparing the image information from the images of a series in order to detect the presence of undesired particles, such as glass particles, in the packaging.

8. Method as claimed in one or more of the foregoing claims, wherein the image recording device is a camera which is activated to make a recording by a signal

5 supplied from outside the camera.

9. Method as claimed in one or more of the foregoing claims, wherein during performing of the method a packaging is placed in a holder comprising a drive unit, radiating means for generating the radiation, and

10 position-determining means for determining the rotational position of the packaging.

10. System for performing a method as claimed in one or more of the foregoing claims.

15

1/6

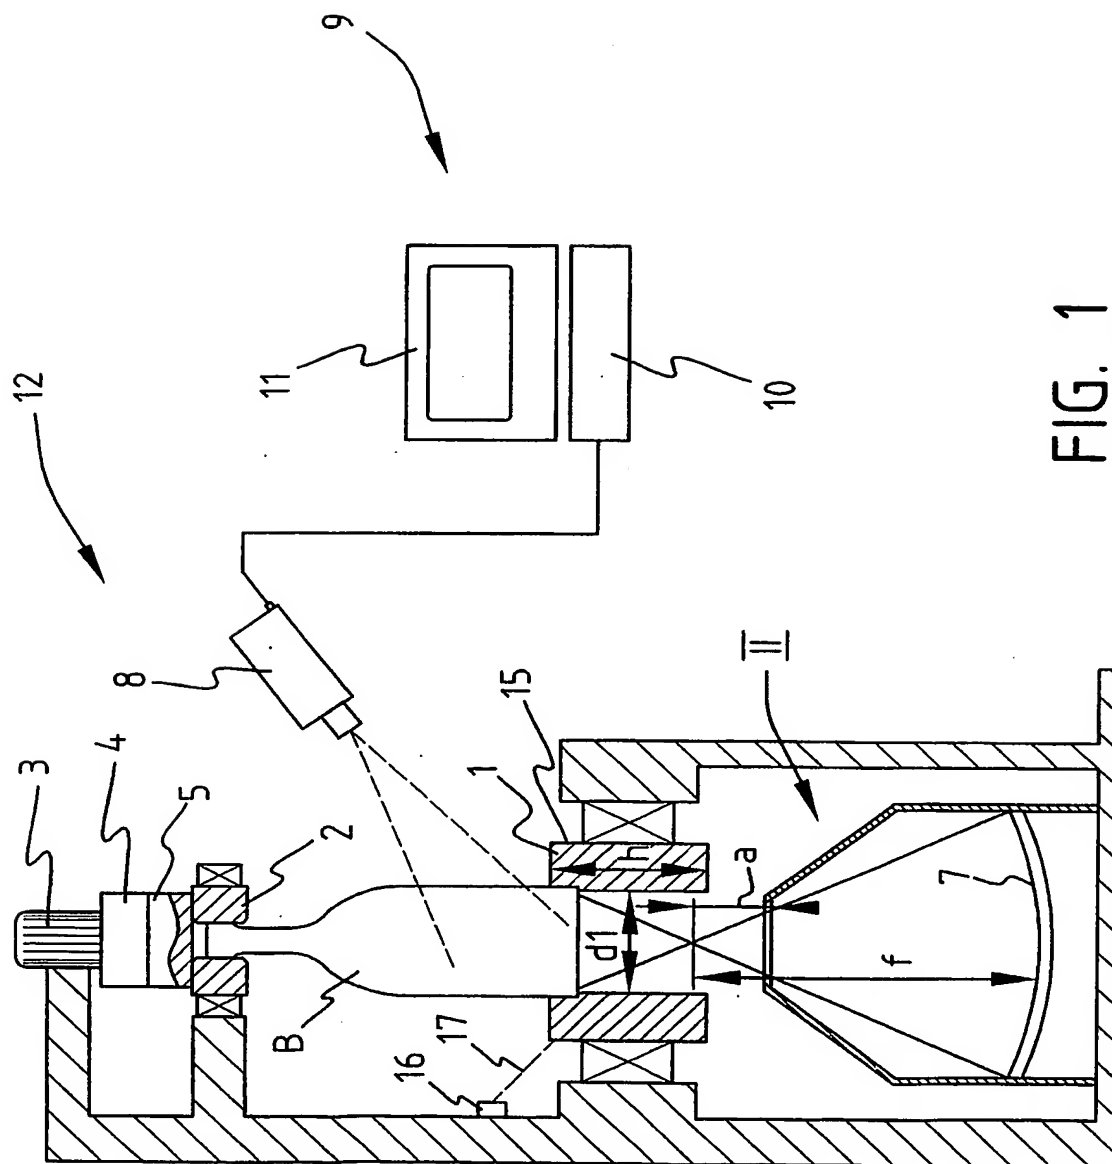
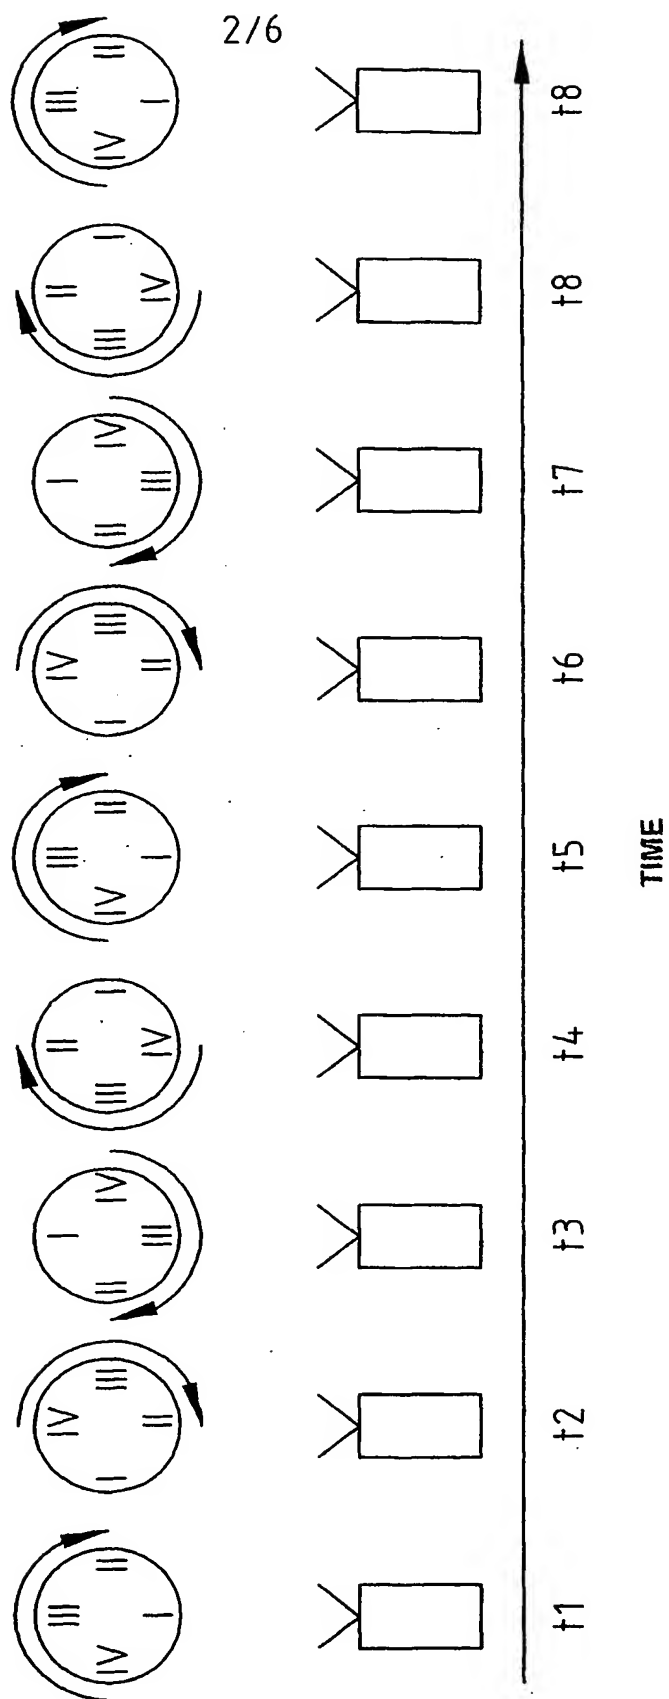
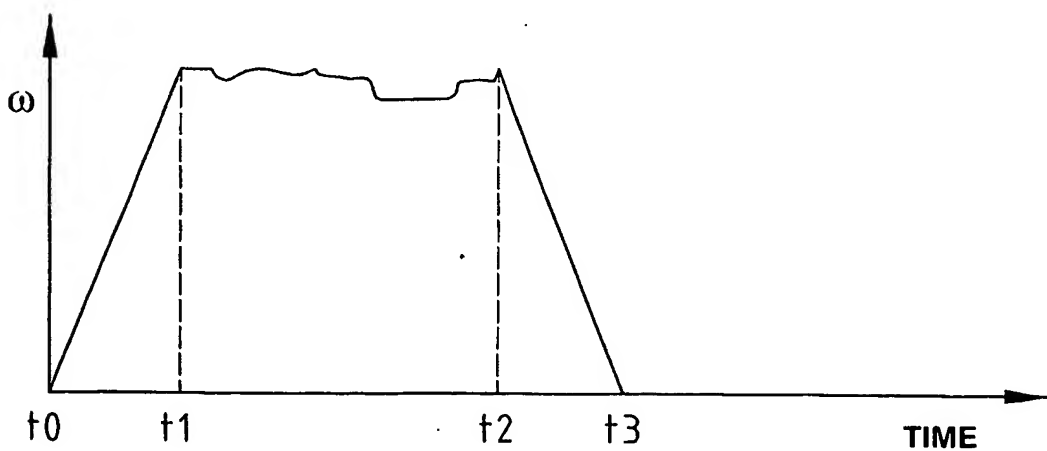
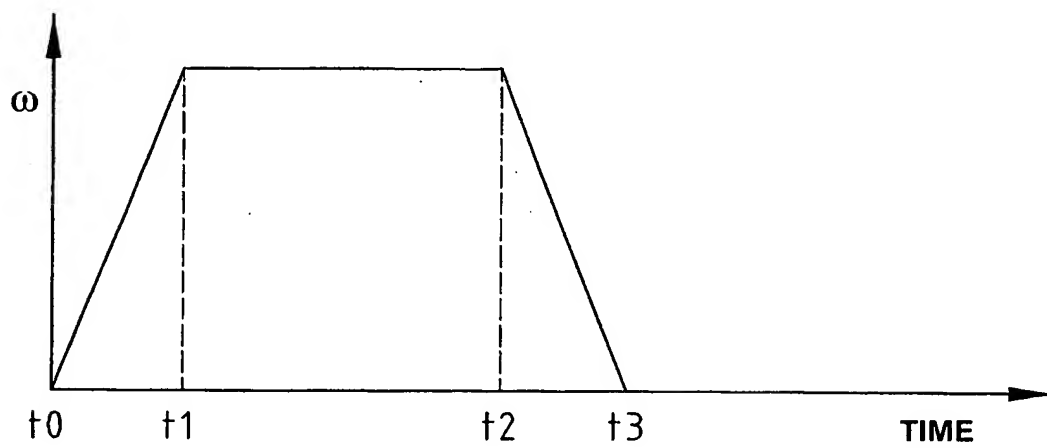
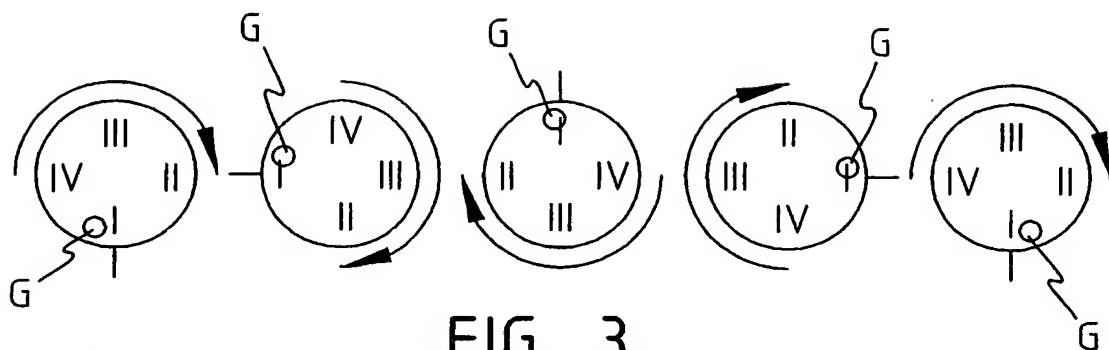
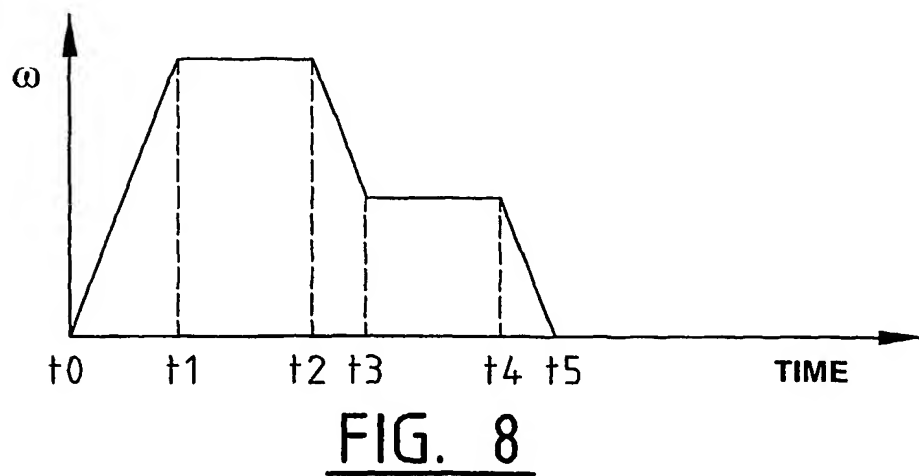
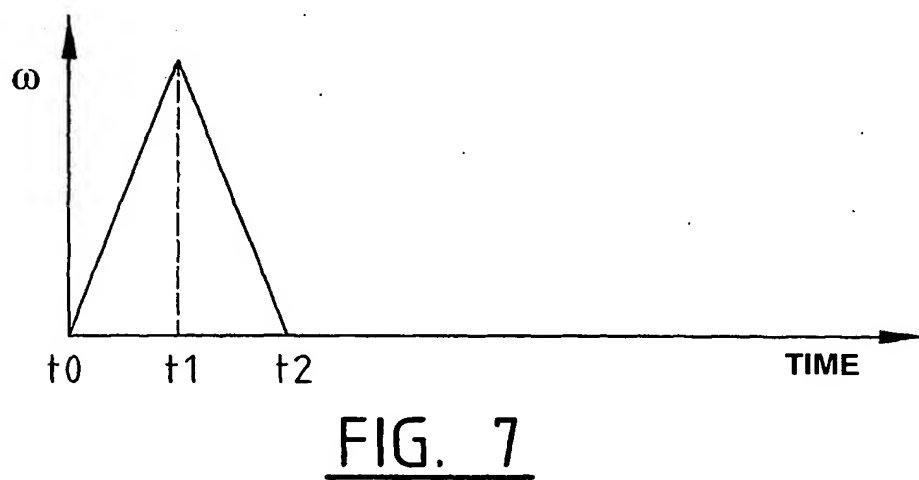
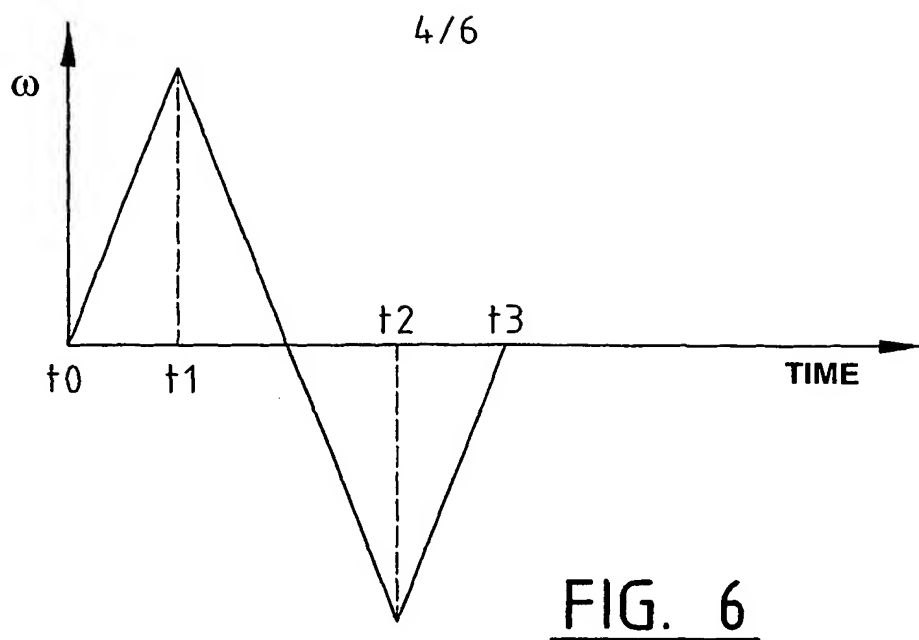


FIG. 1

FIG. 2

3/6





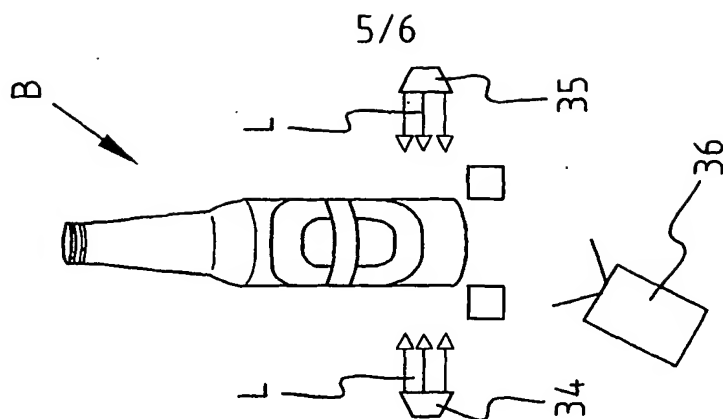


FIG. 11

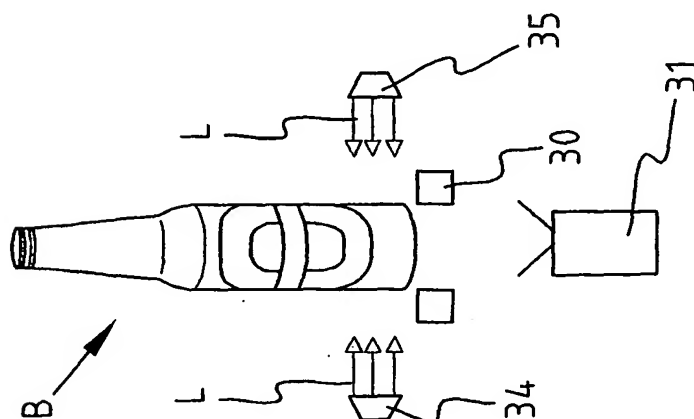


FIG. 10

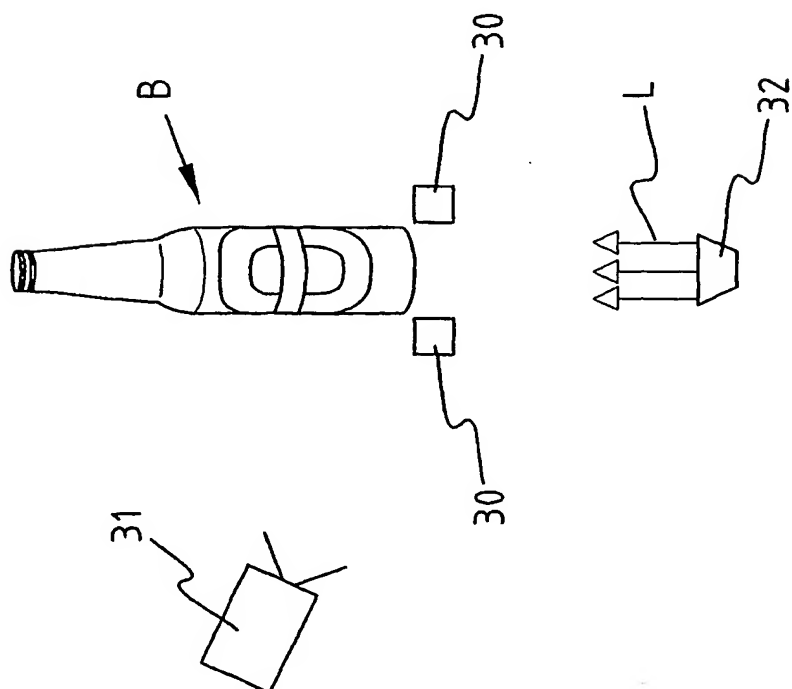


FIG. 9

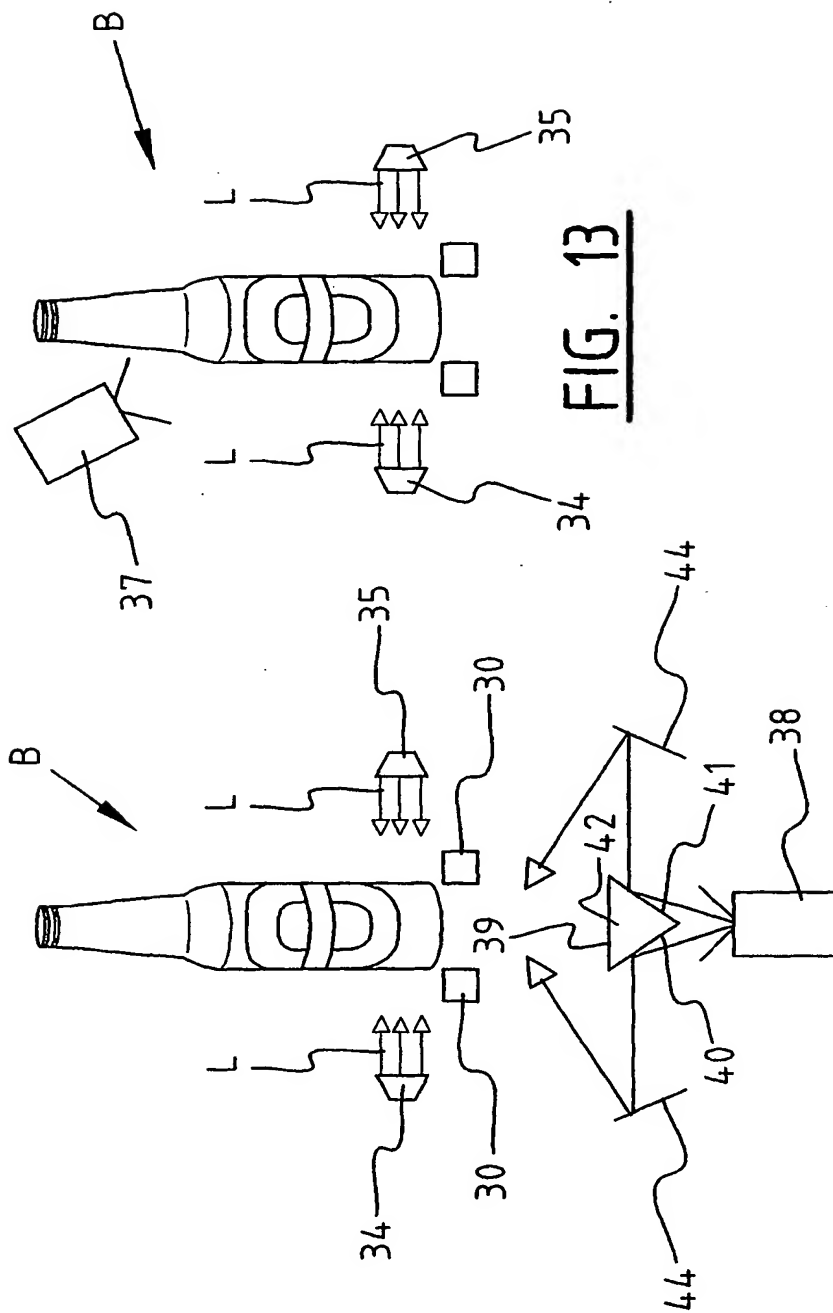


FIG. 12

FIG. 13

INTERNATIONAL SEARCH REPORT

Application No
PCT/NL2004/000150

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 601N21/90

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 601N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX, INSPEC, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 418 005 A (SHIBUYA KOGYO CO LTD) 20 March 1991 (1991-03-20)	1,3,5-8, 10
Y	column 3, line 52 - column 4, line 12 column 4, line 23 - line 51 column 6, line 5 - line 25 column 6, line 38 - line 46 column 8, line 26 - line 40 figure 4	4
Y	US 3 496 369 A (MAKINO ISAO ET AL) 17 February 1970 (1970-02-17) column 4, line 50 - column 5, line 10	4
X	EP 0 303 175 A (KANEBO LTD) 15 February 1989 (1989-02-15) column 4, line 38 - line 46	1,3,6-8, 10
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *A* document member of the same patent family

Date of the actual completion of the international search

10 June 2004

Date of mailing of the international search report

25/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Verdoodt, E

INTERNATIONAL SEARCH REPORT

Application No
PCT/NL2004/000150

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 528 544 A (ONozATO KIMISHIGE ET AL) 15 September 1970 (1970-09-15) column 2, line 10 - line 24 -----	5
A	US 5 523 560 A (MARTINUSSEN TOMMY ET AL) 4 June 1996 (1996-06-04) figure 3D -----	4
A	GB 798 144 A (GEN ELECTRIC CO LTD) 16 July 1958 (1958-07-16) page 1, line 63 - line 79 page 2, line 25 - line 53 -----	1,5
A	WO 97/14956 A (HEINEKEN TECH SERVICES ;CRONSHAW ANTHONY JAMES (GB); HODGES CHRIST) 24 April 1997 (1997-04-24) cited in the application the whole document -----	2,7,8
A	WO 00/77499 A (AKKERMAN JENSEN PETER ;EAGLE VISION SYSTEMS B V (NL); JOORDENS SER) 21 December 2000 (2000-12-21) the whole document -----	1,9,10

INTERNATIONAL SEARCH REPORT

Application No
PCT/NL2004/000150

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0418005	A	20-03-1991	JP 2019886 C	19-02-1996
			JP 3096842 A	22-04-1991
			JP 7043327 B	15-05-1995
			JP 1965107 C	25-08-1995
			JP 3120451 A	22-05-1991
			JP 6095078 B	24-11-1994
			DE 69005069 D1	20-01-1994
			DE 69005069 T2	19-05-1994
			EP 0418005 A1	20-03-1991
			KR 9207161 B1	27-08-1992
			US 5073708 A	17-12-1991
US 3496369	A	17-02-1970	CH 476302 A	31-07-1969
			DE 1698225 A1	20-01-1972
			NL 6803619 A , B	16-09-1968
EP 0303175	A	15-02-1989	JP 1135352 U	18-09-1989
			JP 1291110 A	22-11-1989
			JP 1802260 C	26-11-1993
			JP 5012641 B	18-02-1993
			JP 1038640 A	08-02-1989
			JP 1822846 C	10-02-1994
			JP 5035986 B	27-05-1993
			JP 1143947 A	06-06-1989
			JP 1858738 C	27-07-1994
			JP 5075351 B	20-10-1993
			DE 3887937 D1	31-03-1994
			DE 3887937 T2	07-07-1994
			EP 0303175 A2	15-02-1989
			US 4912318 A	27-03-1990
US 3528544	A	15-09-1970	CH 489797 A	30-04-1970
			DE 1800731 A1	19-06-1969
			FR 1583039 A	10-10-1969
			GB 1244744 A	02-09-1971
			NL 6814029 A , B,	08-04-1969
			SE 355675 B	30-04-1973
US 5523560	A	04-06-1996	AT 121841 T	15-05-1995
			AU 655454 B2	22-12-1994
			AU 1233492 A	07-09-1992
			CA 2100776 A1	02-08-1992
			DE 69202242 D1	01-06-1995
			DE 69202242 T2	31-08-1995
			WO 9214142 A1	20-08-1992
			DK 569464 T3	04-09-1995
			EP 0569464 A1	18-11-1993
			FI 933414 A	30-07-1993
			HU 70248 A2	28-09-1995
			JP 3193377 B2	30-07-2001
			JP 6505333 T	16-06-1994
			KR 225088 B1	15-10-1999
			NO 932744 A	30-07-1993
GB 798144	A	16-07-1958	NONE	
WO 9714956	A	24-04-1997	AT 239914 T	15-05-2003
			AU 712622 B2	11-11-1999

INTERNATIONAL SEARCH REPORT

Application No
PCT/NL2004/000150

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9714956	A		AU 4845996 A	07-05-1997
			BR 9610939 A	02-03-1999
			CA 2234217 A1	24-04-1997
			CN 1200175 A , B	25-11-1998
			DE 69628028 D1	12-06-2003
			DE 69628028 T2	08-04-2004
			DK 858595 T3	02-06-2003
			EP 0858595 A1	19-08-1998
			ES 2198475 T3	01-02-2004
			HK 1017426 A1	19-09-2003
			JP 11513799 T	24-11-1999
			WO 9714956 A1	24-04-1997
			PT 858595 T	30-09-2003
			SI 858595 T1	31-10-2003
			US 6275603 B1	14-08-2001
WO 0077499	A	21-12-2000	NL 1012323 C2	19-12-2000
			AU 5714100 A	02-01-2001
			WO 0077499 A1	21-12-2000